
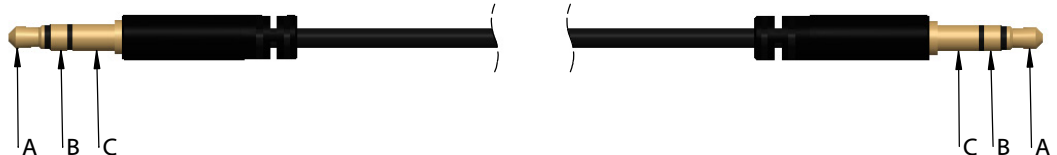


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00502	Connector, stereo plug, 3.5xL20.5 mm, brass, gold plated, molding style	2	
2	30-00653	Wire, 2C TS, 28 AWG, 150V, 70C, 2.6 mm, spiral shield, TPU	1	Bio-compatible jacket
3	24-00028	Overmold, TPE, black	2	

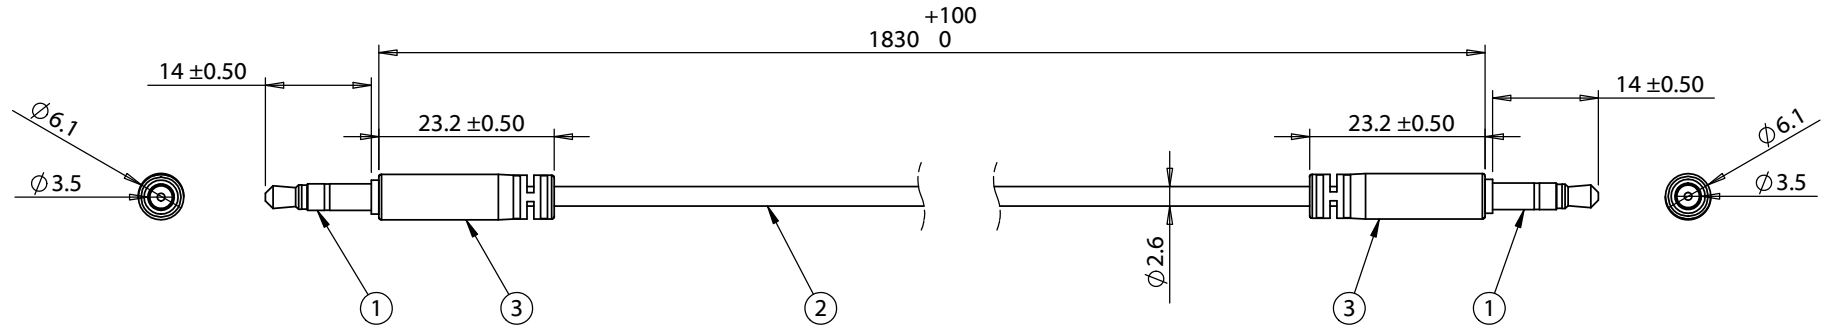

Wiring diagram		
50-00502	Wire Color	50-00502
A	White	A
B	Black	B
C	Shield	C

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES
A	10/20/2015	Initial release		RoHS and REACH compliant
A1	11/11/2015	Modified overmold material	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT
A2	01/07/2016	Modified dimensions	DIMENSIONS ARE IN MILLIMETERS	Functionally equivalent components may be used
			TOLERANCES:	Drawing in third angle projected
			X: ± 0.5 mm	DESCRIPTION:
			X.X: ± 0.3 mm	Cable, 1830 mm, 3.5 mm 3C 50-00502 slim audio plug to same, 28 AWG, 30-00653, shielded
			X.XX: ± 0.05 mm	

TENSILITY

20802 Sockeye Place #130
 Bend, OR 97701 USA
 tel 541.323.3228 fax 541.323.4202
 800 877.670.7118 www.tensility.com

SIZE	PART NUMBER
A	10-02047
SCALE: 1:1	WEIGHT:
SHEET 1 OF 1	

5

4

3

2

1